



Protema electric trolley 8SYSTEM70

SPECIFICATION:	
Art nr (incl platform/forks):	8PRO70SB
Max load capacity	70 kg
Min lifting height	80 mm
Max lifting height	1640 mm
Stroke	1560 mm
Weight	38 kg
Lifting speed	0,085 m/s
Battery & battery charger	24V DC 7Ah / 55 W
Lift/load	100 x 70 kg x 1m
Total height	2001 mm
Wheels	Front Ø60 mm back (braked) Ø125 mm




Protema PRO70 lifts loads up to 70 kg. Built-in charger that connects to a standard outlet (120/240 V AC). Overload protection. Tape switches on front legs stop platform movement when activated. Front wheels with needle bearings. Delivered with removable platform in polyethylene and with expandable forks for lifting empty pallets. Other applications: central brake, cover stril for chain/mast profile. CE Cert. 08-SKM-CM-0121

**EXPANDABLE FORKS
ONLY FOR EUR
EMPTY PALLETS**




Rev.	Modification	Date	Creator	Approved

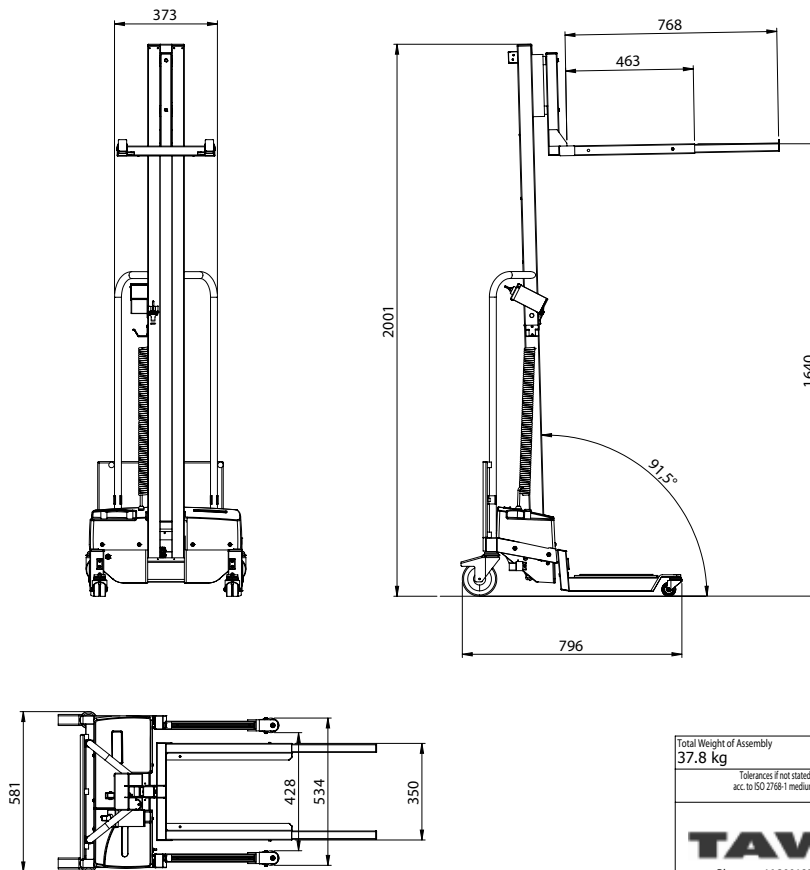

Protema 8SYSTEM70
EQUIPPED WITH expandable forks and
platform surface in polyethylene.

Max load capacity 70 kg
ONLY empty EUR-pallets may be lifted with
the extended fork-application.
Max lifting height 1640 mm
Min lifting height 80 mm
Stroke 1560 mm
Mast angle 1.5°

This drawing remains the property of TAWI AB and shall be returned upon request. It should not be copied without our written allowance. All dimensions are in millimeters unless otherwise stated. For more information, please contact our sales department. Conversion will be provided with the support of the existing law.

Total Weight of Assembly 37.8 kg	Surface Finish None	Assembly Note	
Tolerances if not stated acc to ISO 2768-1 medium	Scale 1:12	Sheet 1 (1)	Date 2008-04-07
 Phone: +46 30018500 www.tawi.com	Name 8System70	Creator DJ	Approved DJ
	Project / Division Protema	Inspected DJ	Replaced by DJ
	Drawing nr 8System70	Replace 8PRO70SB	

Copyright TAWI AB Sweden 2011 All rights reserved